




Your Expert Partner...

TRIPLEX PUMP 'DTP' SERIES

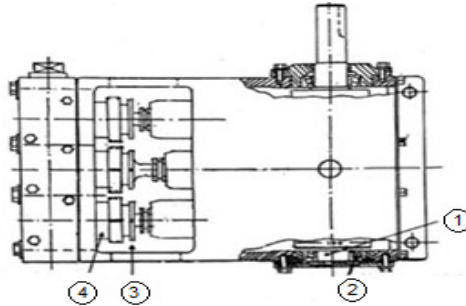

1. CRANK SHAFT 2. BEARING 3. HEAD
4. PLUNGER

TRIPLEX PUMP 'DTP' SERIES SELECTION CHART

Pump Model	Flow Rate	Max Pressure
	Lit./Hr.	Kg/cm2
DTP-1	500	100
DTP-2	4000	300
DTP-3	10000	500
DTP-4	20000	700

FEATURES

1. Performance Conforms to API 674 standard.
2. Modular Configuration: Triplex and Quadriplex.
3. Turn Down ratio 5:1 with VFD
4. Can Handle high viscous material.
6. No weld on liquid end parts.
7. Connection available: NPT/ISO, and ANSI/ISO Flange
8. Coupling: Direct Geared Motor or Pulley Belt.

MOC CHART

SL. NO	DESCRIPTION	MOC
1	PLUNGER	SS304, SS316, Alloy, CS, etc.
2	LIQUID HEAD	SS304, SS316, Alloy, CS, etc.
3	NRV	SS304, SS316, Alloy, CS, etc.
4	GLAND PACKING	PTFE